


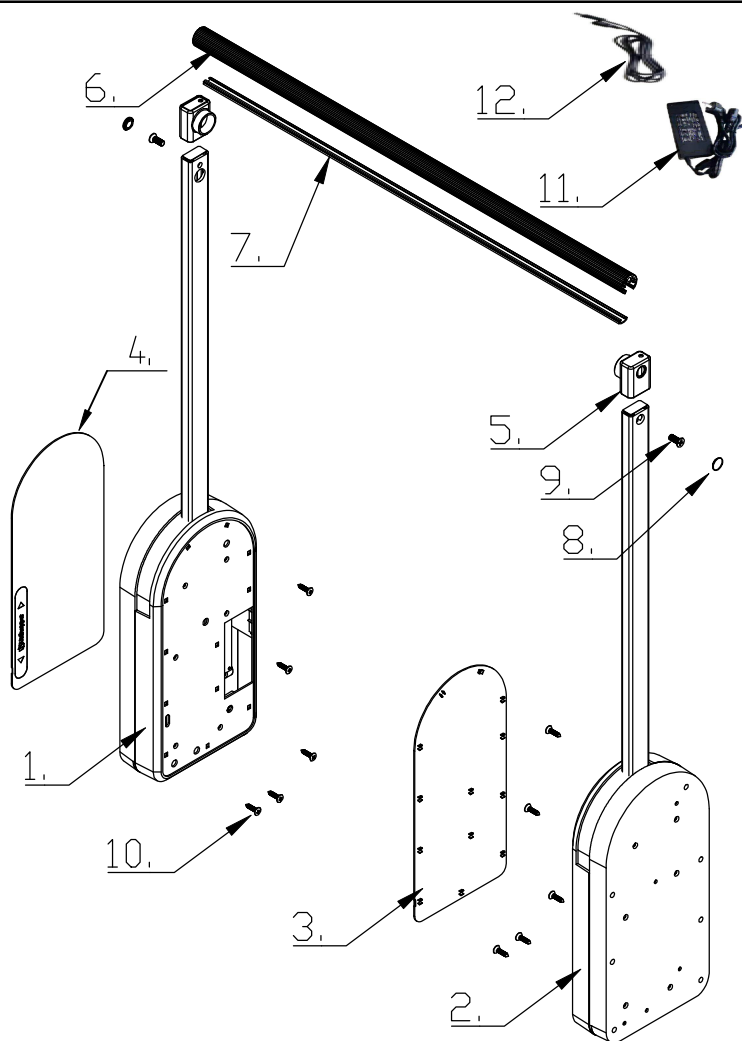
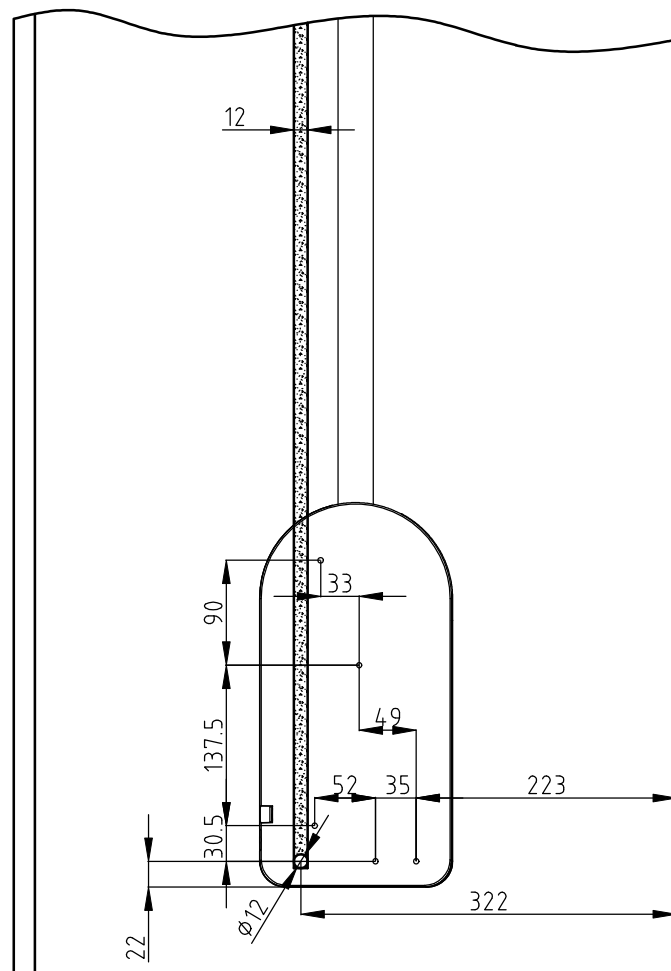
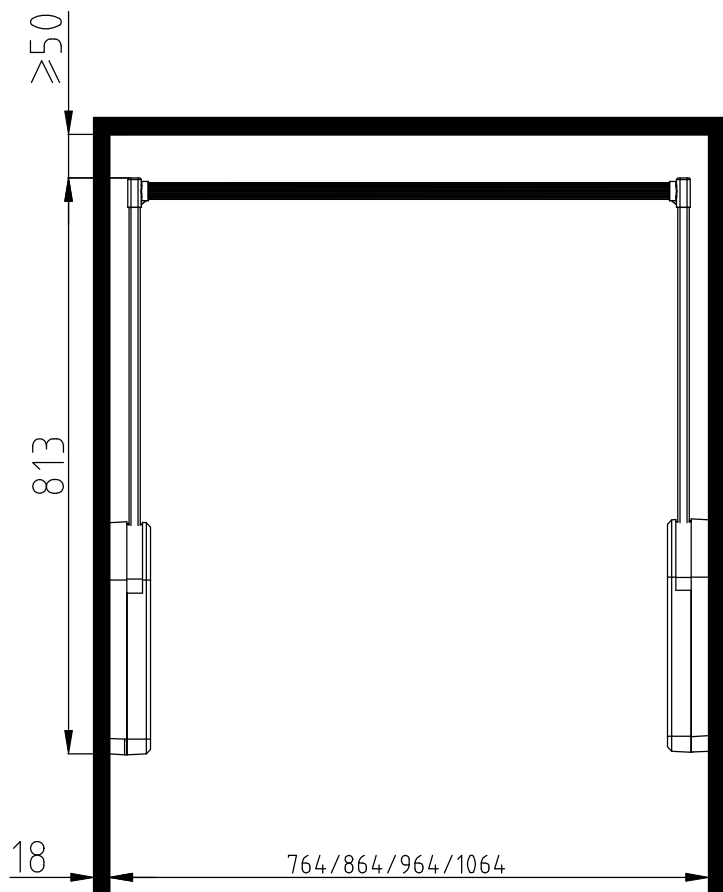
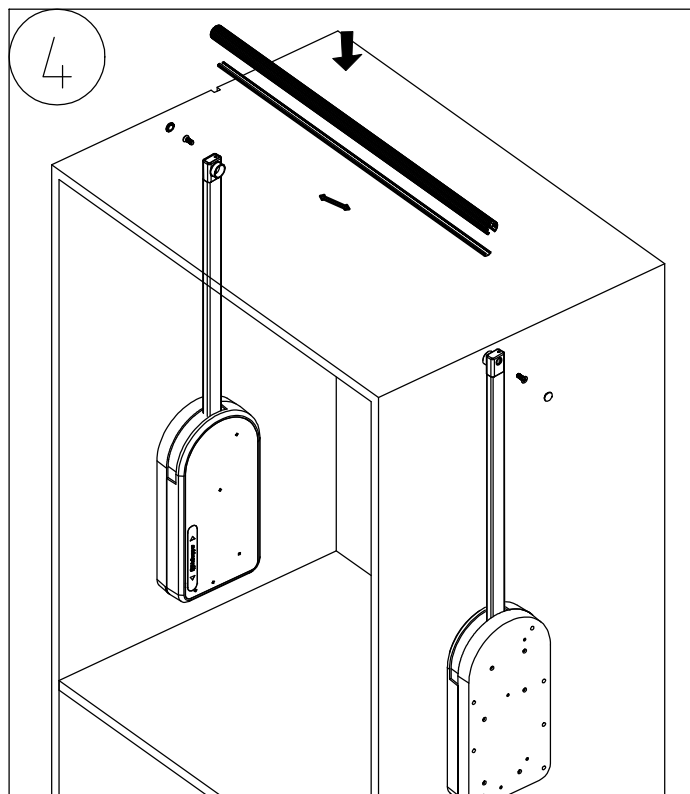


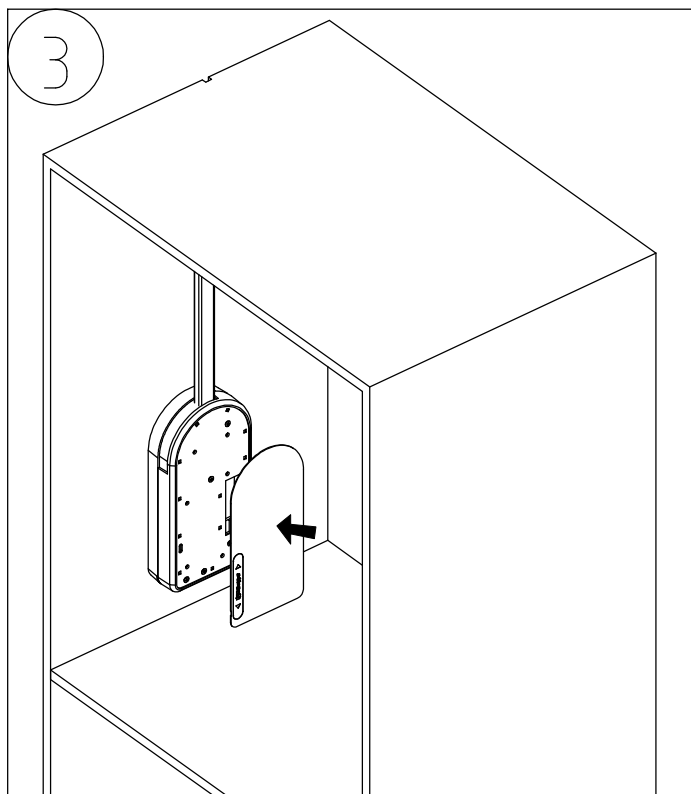


No.	Component	Qty
1	Left mounted bracket	1
2	Right mounted bracket	1
3	Right bracket cover	1
4	Left bracket cover	1
5	Connector	2
6	Cross upper bar	1
7	Cross bottom bar	1
8	Cover for connector	2
9	M6*16 flat head screws	2
10	M4*20 self-tapping screws	10
11	Power supply	1
12	Cable	1

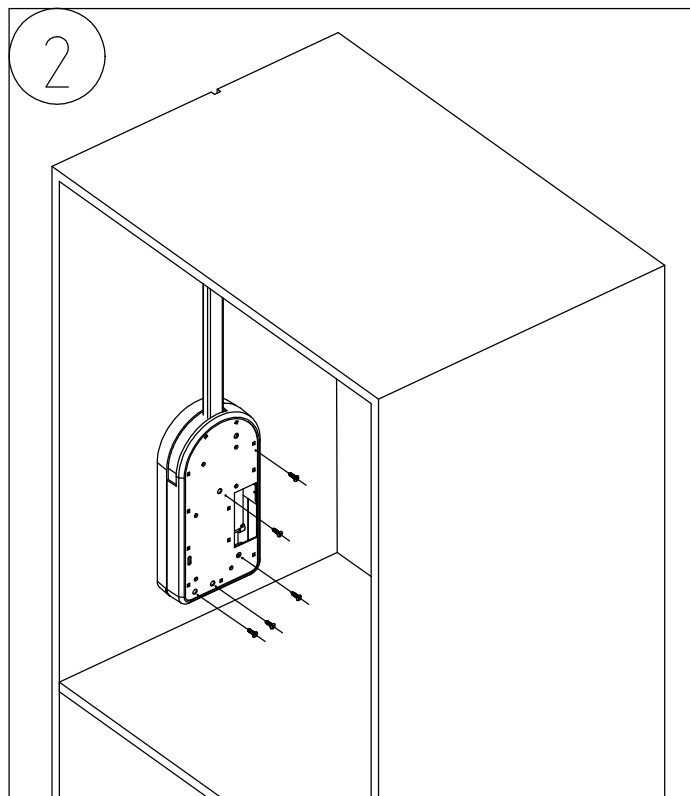

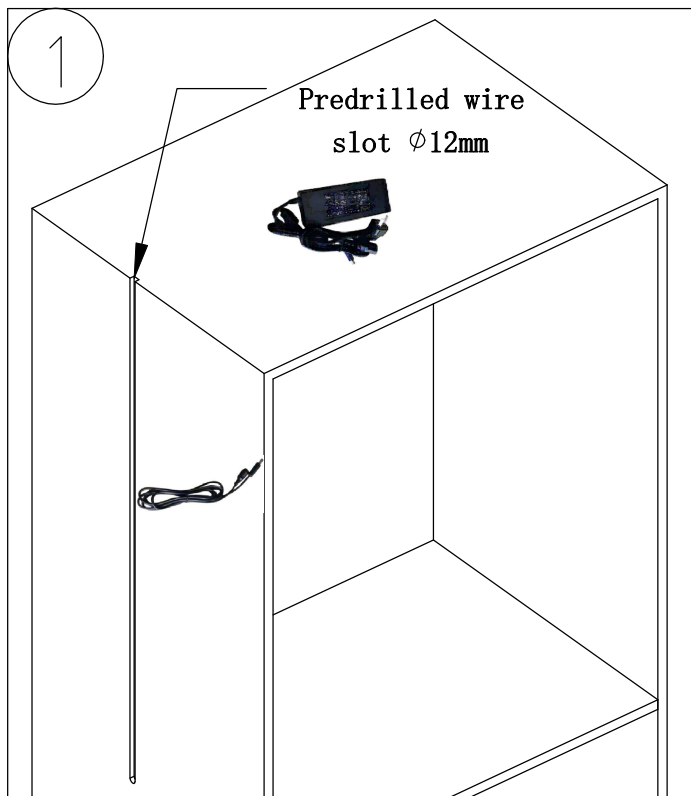

Touch button

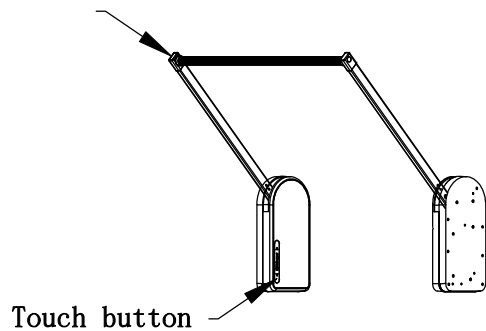

Installation video



Product parameters

Rated Voltage:

Input 110-280V Output 24V

Power: 120 W

Safety Features:

Anti-collision, anti-pinch,
intelligent protection against overcurrent

Maximum Load Capacity: 20 kg

Lifting Time: 7 seconds