



箱体	新型号	W	X	Y	Z
450	WB1208S. 045E	182. 5	1525	1675	min. 1690
600	WB1208S. 060E	257. 5	1525	1675	min. 1690
450	WB1208S. 045D	182. 5	1225	1425	min. 1450
600	WB1208S. 060D	257. 5	1225	1425	min. 1450
450	WB1208S. 045C	182. 5	925	1075	min. 1090
600	WB1208S. 060C	257. 5	925	1075	min. 1090
450	WB1208S. 045B	182. 5	625	825	min. 850
600	WB1208S. 060B	257. 5	625	825	min. 850

Technical drawing of a sliding door assembly. The main view shows a side elevation of the door frame and door panel. Dimensions include a height of 600, a width of 480, and a minimum clearance of 490 Min. Callout A shows a detail of the top hinge mechanism. Callout B shows a detail of the bottom roller assembly. Callout C shows a detail of the door panel's internal structure and mounting hardware. The door panel is labeled with 'A' and 'B' at the top and bottom edges respectively. The frame is labeled with 'C' at the top and bottom edges respectively. The door panel is shown in an open position, revealing the internal roller mechanism.

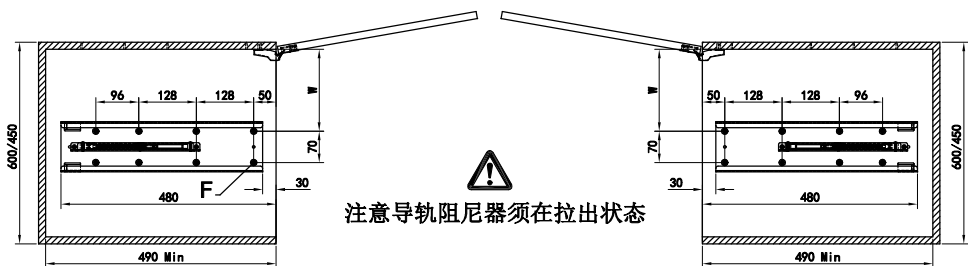





 图示为右开门的安装，左开门与右开门为镜像对称安装


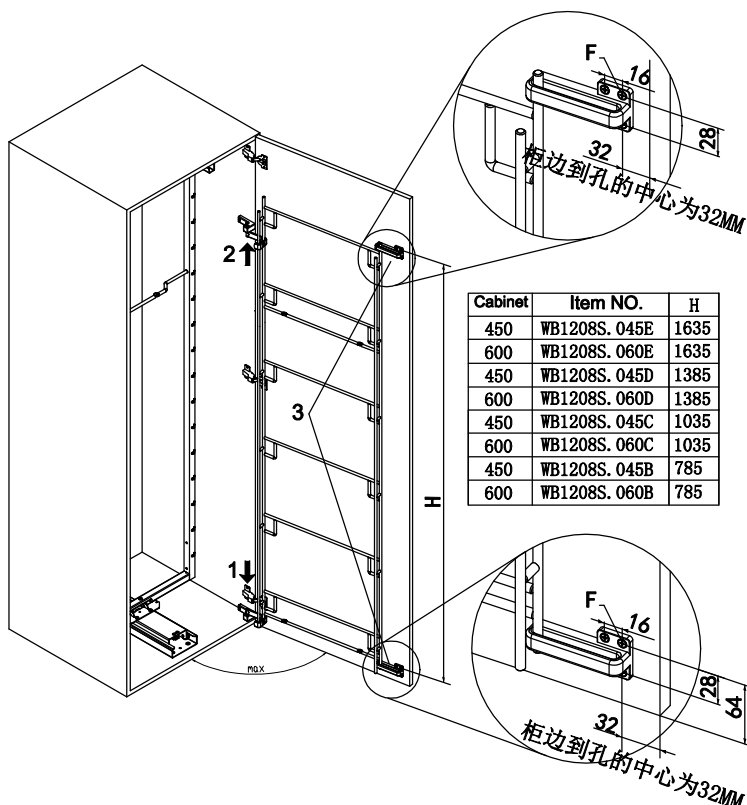


Cabinet	Item NO.	H
450	WB1208S. 045E	1635
600	WB1208S. 060E	1635
450	WB1208S. 045D	1385
600	WB1208S. 060D	1385
450	WB1208S. 045C	1035
600	WB1208S. 060C	1035
450	WB1208S. 045B	785
600	WB1208S. 060B	785




右开门组装

左开门组装

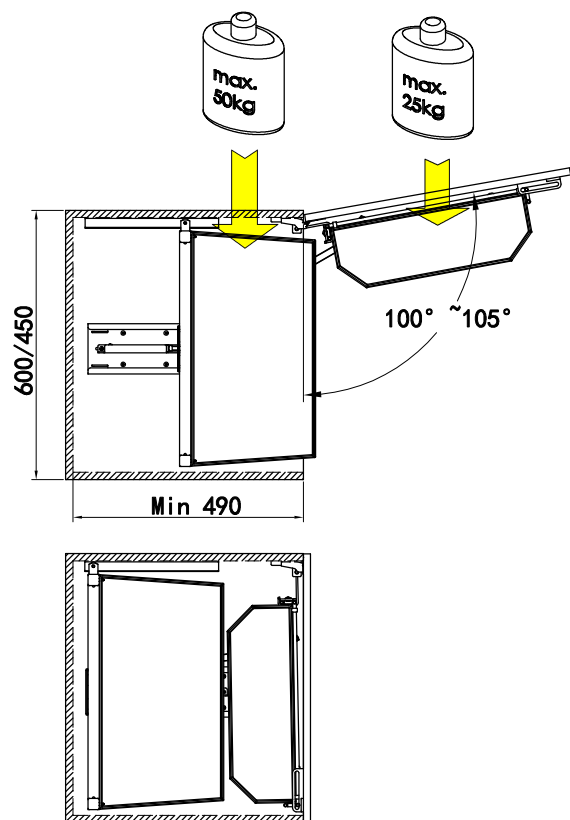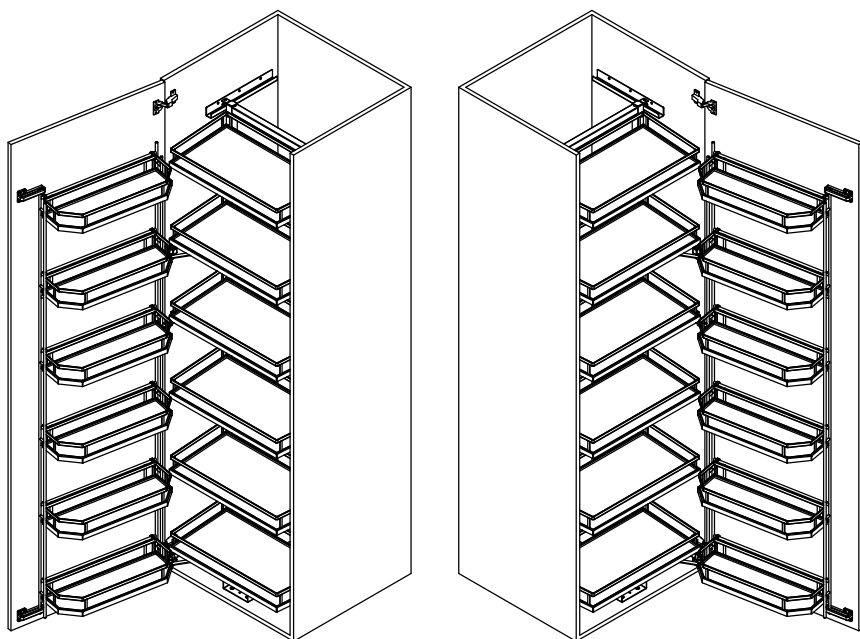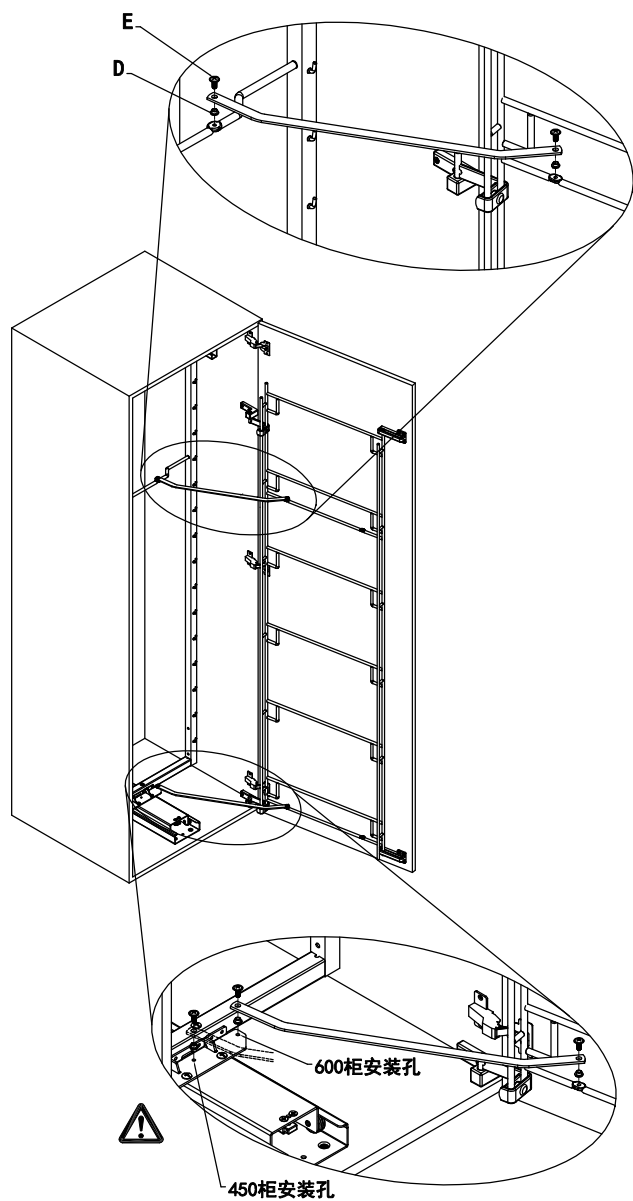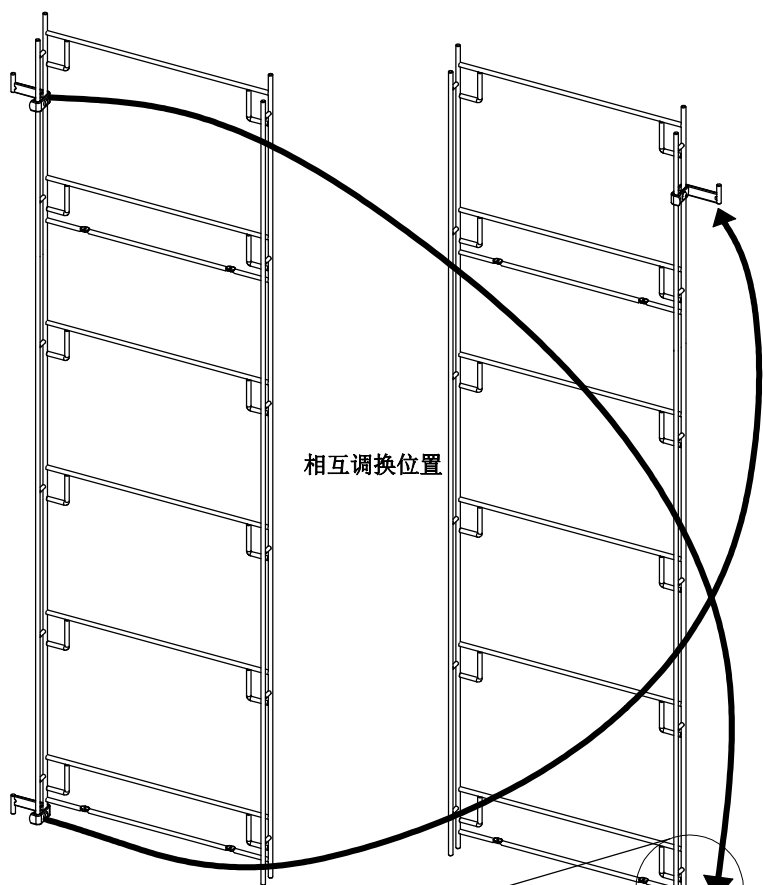


A		4pcs	沉头M5*8L		1pcs	连杆
B		2pcs	盘头M6*30L		1set	门篮架
C		2pcs	沉头M6*12L		1set	主架
D		2pcs	连杆垫圈		1pcs	滚轮导向件
E		2pcs	盘头M5*10L		2pcs	大篮
F		16pcs	ST4*16L		2pcs	小篮
G		3pcs	ST4*14L			
H		4pcs	ST4*20L			
I		2pcs	转轴支撑件			
J		2pcs	门篮架导向件			
		1set	导轨			
		1pcs	导向槽			


将主架安装到导轨上.

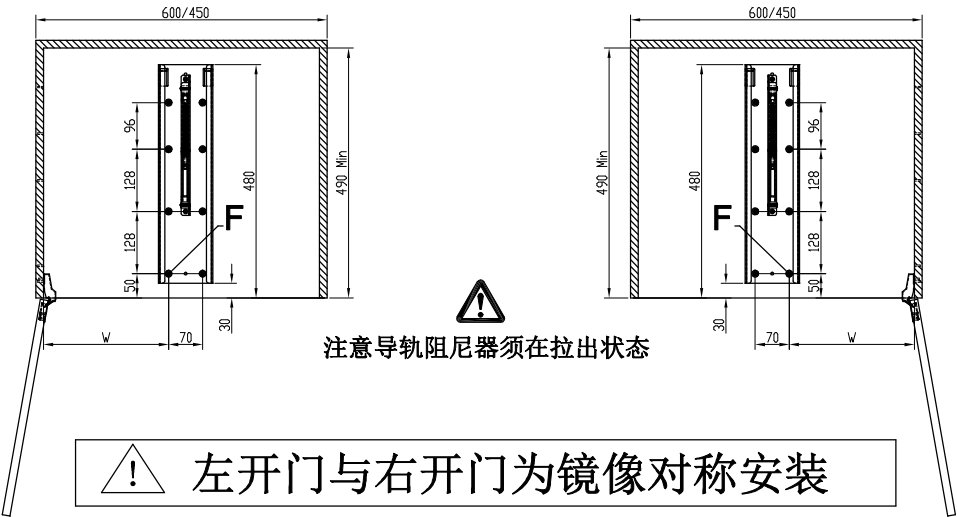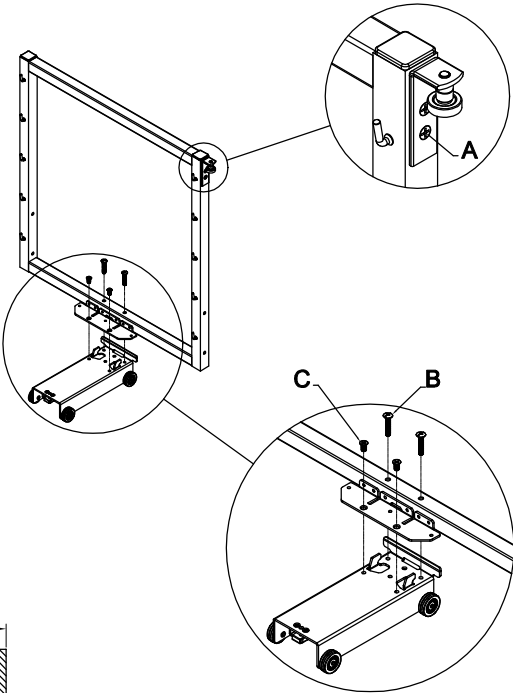

! 左开门与右开门为镜像对称安装


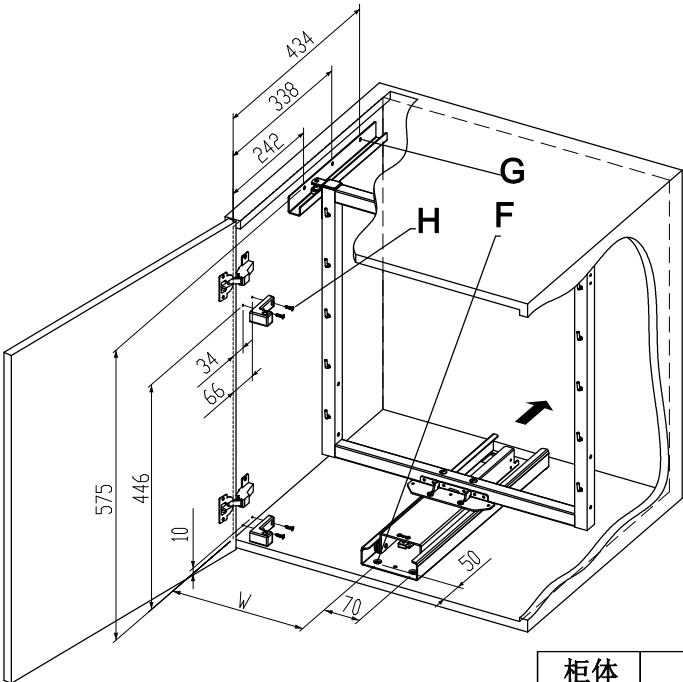


左开门

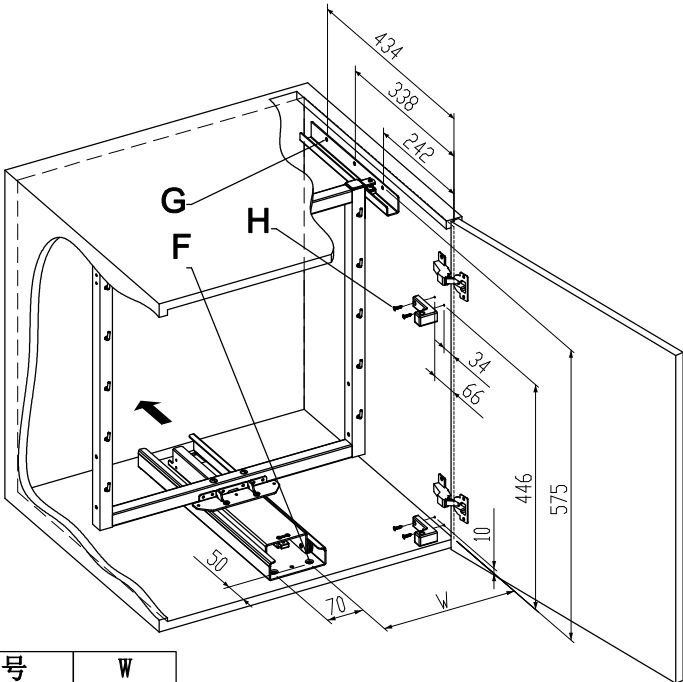


右开门

柜体	新型号	W
450	WB1208S. 045A	182. 5
600	WB1208S. 060A	257. 5

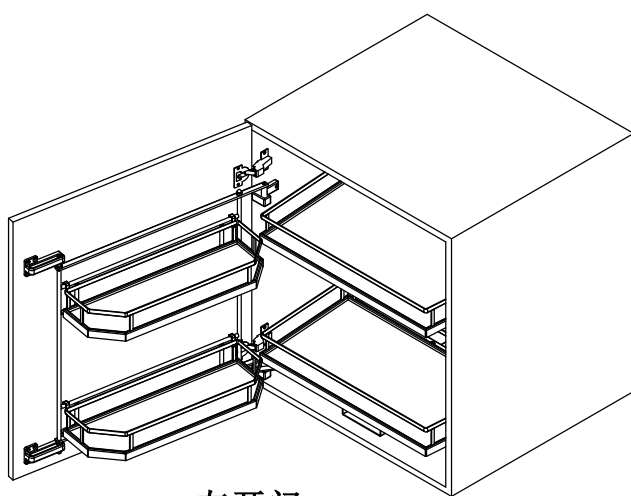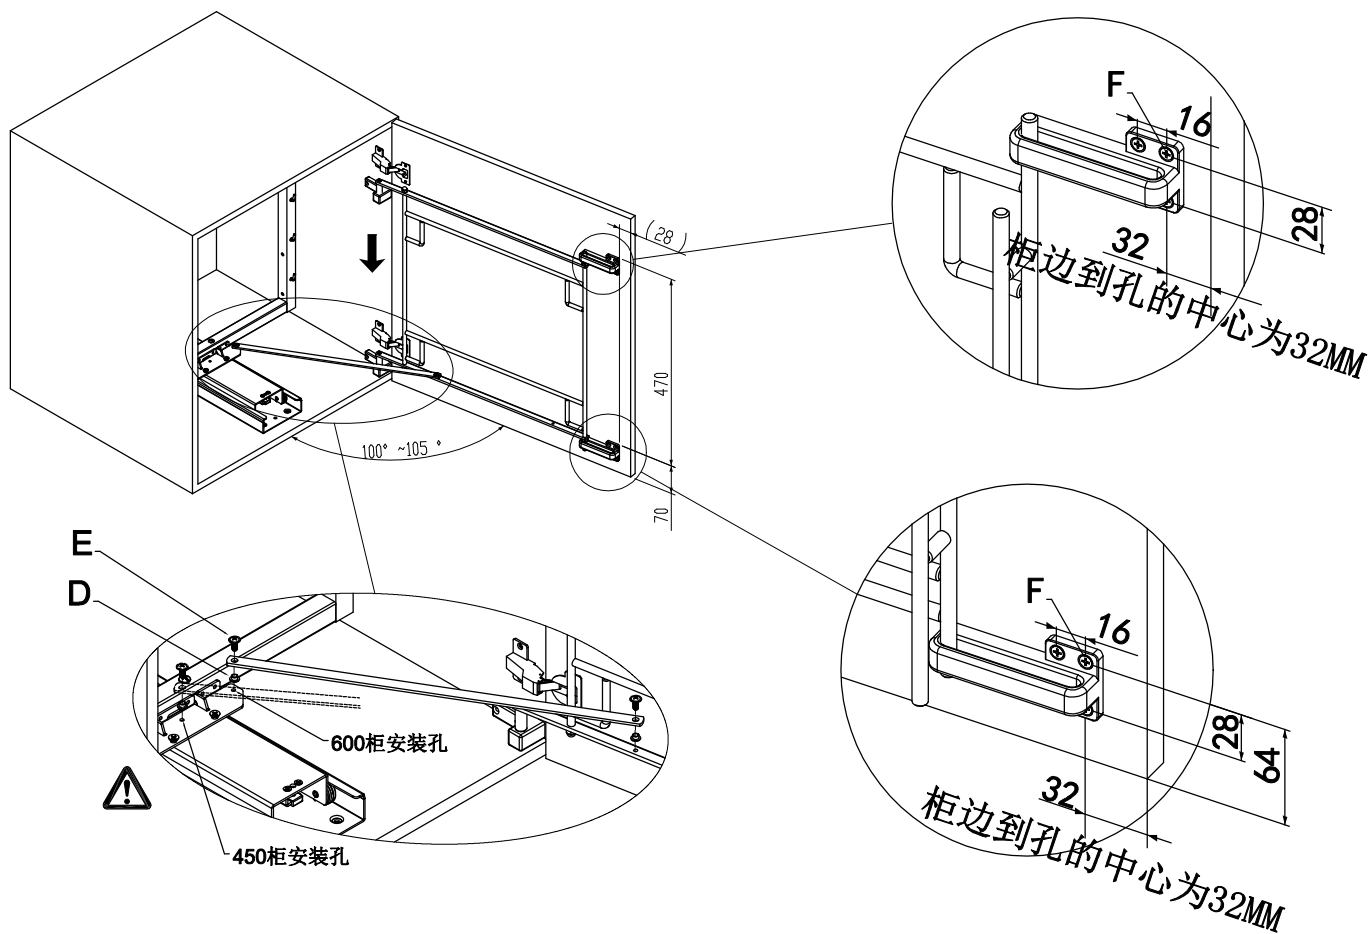

左开门

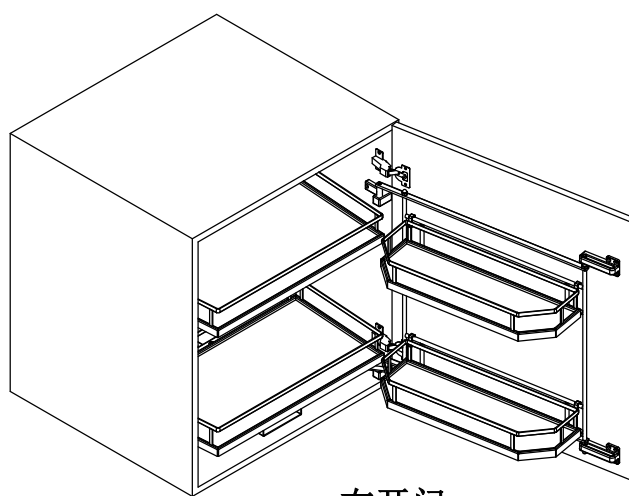

右开门

